


## 4.3 Vertical version



The clear space of the Logo should be marked with an 'A' module equal to the width of the shield. The safe area is ensured by adding a square with sides of length of one module 'A' deviating from each corner of the Logo's envelope.

When using solid tints in the Logo's background, the minimum safe area should be taken by adding a square with sides of 0.5 module 'A' to each corner of the Logo's envelope.

Positive

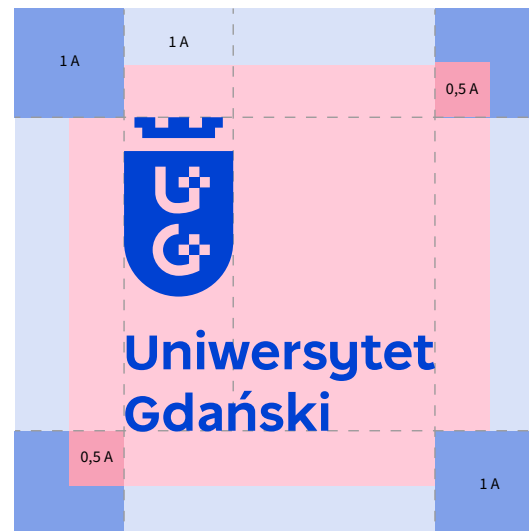

Negative



### IMPORTANT!

THIS RULE ALSO APPLIES TO THE NEGATIVE VERSION. NOTE, HOWEVER, THAT THE PROPORTIONS OF THE TWO VERSIONS ARE SLIGHTLY DIFFERENT.